




VENTOSE 4 PIASTRE A CROCE serie TOP


VACCUUM LIFTER WITH 4 SUCTION PADS

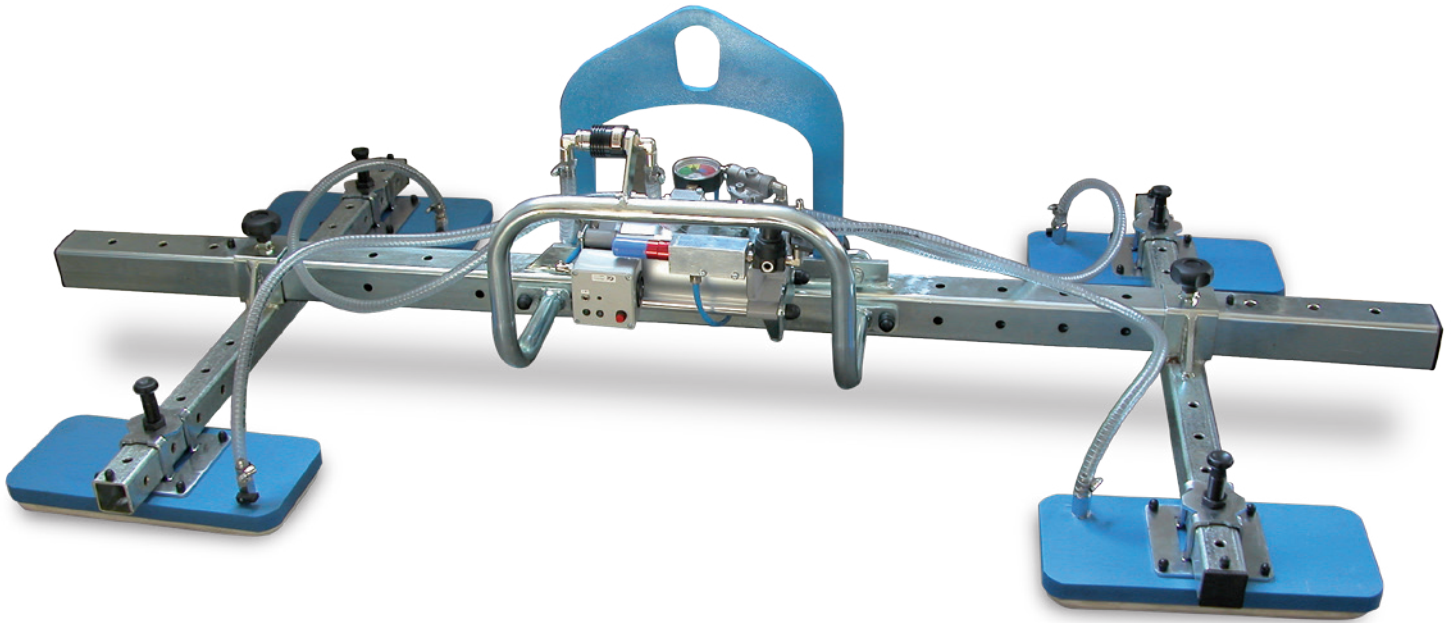

Tipo/Type **CMV 2/4 M - CMV 1/4 M RL**

Portata (kg)/Capacity	500	1000	2000
N° piastre/N° Suction cups	4	4	4
Misure (mm)/Size			
Piastre/Suction cups A	500	500	600
B	200	300	400

Dimensioni/Dimension L	1455	1455	1455
M	1000	1000	1000
C min/max	1780/1130	1880/1230	2030/1380
N min/max	1110/310	1310/510	1510/710
H	537	547	567

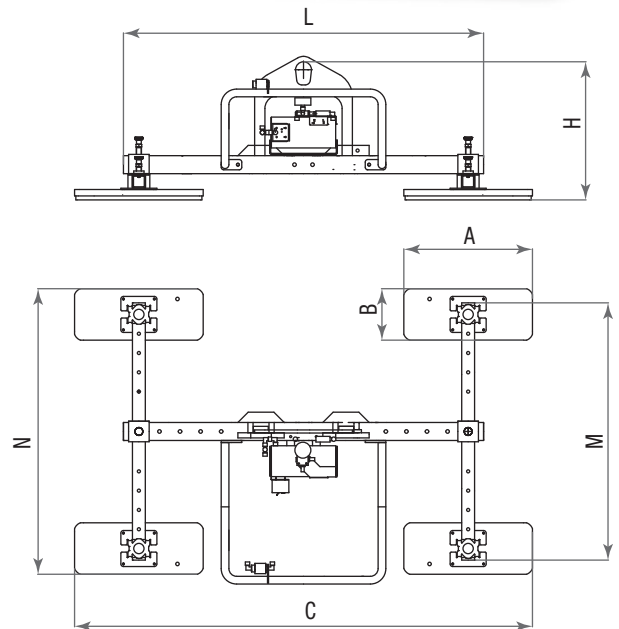

CMV 2/4 MRL - CMV 1/4 MRL

Utilizzata per movimentare materiali fragili o di grandi dimensioni

- Funzionamento con pompa del vuoto ad aria compressa serie CMV2/4 MRL
- Funzionamento con gruppo pompante elettrico serie CMV1/4 MRL
- Struttura portante con basculamento manuale 0/90°
- Piastre aspiranti in nylon escludibili
- Guarnizioni idonee per superfici lisce o ruvide/irregolari
- Guarnizioni sostituibili rapidamente
- Regolazione della posizione delle piastre aspiranti
- Vuotometro di controllo
- Valvola a corsoio con sicurezza
- Serbatoio di prevuoto in alluminio
- Sistema di allarme acustico

CMV 2/4 MRL - CMV 1/4 MRL

Used for handling fragile or large sized pieces

- Working with compressed air pump multistage model CMV2/4 MRL
- Working with electric pump model CMV1/4 MRL
- Metal structure, with manual tilting from 0/90°
- Excludible suction plates in nylon
- Gaskets for smooth or rough / uneven surfaces
- Easily replaceable gaskets
- Both direction adjustable suction plates
- Vacuum gauge for check control
- Sliding valve with safety device
- Aluminium vacuum tank
- Acoustic alarm system